

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.

1300 I STREET, N. W.
WASHINGTON, DC 20005-3315

202 • 408 • 4000
FACSIMILE 202 • 408 • 4400

jc574 U.S. PTO
09/448470
11/24/99

ATLANTA
404 • 653 • 6400
PALO ALTO
650 • 849 • 6600

WRITER'S DIRECT DIAL NUMBER:

TOKYO
011 • 813 • 3431 • 6943
BRUSSELS
011 • 322 • 646 • 0353

(202) 408-4024

November 24, 1999

ATTORNEY DOCKET NO.: 04329.2191

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

New U.S. Patent Application
Title: ENCRYPTION APPARATUS, CRYPTOGRAPHIC COMMUNICATION
SYSTEM, KEY RECOVERY SYSTEM, AND STORAGE MEDIUM

Inventors and Addresses:

Akito NIWA
Yokohama-shi, Japan

Shinichi KAWAMURA
Kodaira-shi, Japan

Megumi AOKI
Inagi-shi, Japan

Toshiaki SAISHO
Tokyo, Japan

Tatsuya ISHIHARA
Yokohama-shi, Japan

Fumihiko SANO
Fuchu-shi, Japan

Satomi HORI
Yokohama-shi, Japan

Assistant Commissioner for Patents

November 24, 1999

Page 2

Sir:

We enclose the following papers for filing in the United States Patent and Trademark Office in connection with the above patent application.

1. A check for \$838 representing the filing fee.
2. Application - 34 pages, including 4 independent claim and 8 claims total.
3. Drawings - 8 sheets of formal containing 13 figures.
4. Information Disclosure Statement and Information Disclosure Citation, PTO 1449 with 4 documents attached.

This application is being filed under the provisions of 37 C.F.R. § 1.53(f). Applicants await notification from the Patent and Trademark Office of the time set for filing the Declaration.


Applicants claim the right to priority based on Japanese Application No. 10-334485, filed November 25, 1998.

Please accord this application a serial number and filing date.

The Commissioner is hereby authorized to charge any additional filing fees due and any other fees due under 37 C.F.R. § 1.16 or § 1.17 during the pendency of this application to our Deposit Account No. 06-0916.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

By: 
Richard V. Burgujian
Reg. No. 31,744

RVB/FPD/dvz
Enclosures

TITLE OF THE INVENTION

ENCRYPTION APPARATUS, CRYPTOGRAPHIC COMMUNICATION
SYSTEM, KEY RECOVERY SYSTEM, AND STORAGE MEDIUM

BACKGROUND OF THE INVENTION

5 This application is based on Japanese Patent
Application No. 10-334485, filed November 25, 1998, the
contents of which is incorporated herein by reference.

10 The present invention relates to an encryption
apparatus, cryptographic communication system, key
recovery system, and storage medium, all of which are
characterized by a section for managing encryption and
decryption keys used in encryption and decryption
processes.

15 In recent years, data have been encrypted to
prevent wire tapping and alteration in communicating
data (messages) on an open network.

20 Encryption keys are used for this data encryption.
Users may lose their own keys, or keys may be destroyed
due to some reason. An authorized third party must
intercept data depending on situations. To cope
with these situations, keys must be recovered by
any method.

25 According to the conventional key recovery system,
an authentic user for cryptographic communication
registers a key recovery process in an actual key
recovery agent in advance, and a key recovery field
which allows decryption in correspondence with

this registration is added to the encrypted data.
The encrypted key recovery field is decrypted to
recover the corresponding key (e.g., a secret key for
communication).

5 A sender/receiver or an authorized third party
transmits a key recovery field to a key recovery agent,
as needed, and makes the agent recover a key such as
a lost key.

10 In the conventional key recovery method, however,
it is difficult for the key recovery agent to check if
the key recovery requester has the authorized right.
The key recovery agent may cooperate with a malicious
third party to illegally recover the key. The
conventional method cannot prevent this illegal
15 recovery.

 Assume that the sender and receiver in data
communication register different key recovery agents,
and particularly in international cryptographic
communication. The key recovery field of the sender
20 cannot be recovered by the key recovery agent
registered by the receiver or authentic third party.
For example, the sender registers a key recovery agent
A, and the receiver registers a key recovery agent B.
Assume that the receiver does not know the key recovery
25 agent A and that the receiver loses the secret key for
cryptographic communication. In this case, the lost
public key cannot be recovered even if the key recovery

field of the encrypted data is sent to the key recovery agent B. If the sender and receiver have different nationalities, it is not easy for the receiver to know the location of the key recovery agent A. This also
5 applies to the authentic third party.

BRIEF SUMMARY OF THE INVENTION

An object of the present invention is to provide a cryptographic communication system and key recovery system capable of preventing concentration of rights
10 pertaining to key decryption and conspiracy of agents to make it possible to improve the safety in key recovery.

Another object of the present invention is to provide an encryption apparatus, cryptographic
15 communication system, key recovery system, and storage medium, all of which allow each user or authorized third party to easily acquire agent information and recover keys even if users who register different agents perform cryptographic communications.

20 According to a first aspect of the present invention, an encryption apparatus, comprises: means for encrypting a data body; and means for transmitting transmission data to a receiver, the transmission data including: the encrypted data body; sender's key
25 recovery data obtained by encrypting recovery information for recovering a key for decrypting the encrypted data body to allow a key recovery agent

registered by a sender to decrypt the recovery
information; and receiver's key recovery data obtained
by encrypting the recovery information for recovering
the key for decrypting the encrypted data body to allow
5 a key recovery agent registered by a receiver to
decrypt the recovery information.

According to a second aspect of the present
invention, a cryptographic communication system
comprises: an encryption apparatus, comprising: means
10 for encrypting a data body; and means for transmitting
transmission data to a receiver, the transmission data
including: the encrypted data body; sender's key
recovery data obtained by encrypting recovery
information for recovering a key for decrypting the
15 encrypted data body to allow a key recovery agent
registered by a sender to decrypt the recovery
information; and receiver's key recovery data obtained
by encrypting the recovery information for recovering
the key for decrypting the encrypted data body to allow
20 a key recovery agent registered by a receiver to
decrypt the recovery information; and a plurality of
key recovery agents each, when registered by sender or
receiver, capable of decrypting sender's or receiver's
key comprised of a plurality of key pieces obtained by
25 dividing the key into pieces.

According to a third aspect of the present
invention, a key recovery system comprising:

an encryption apparatus using key information
for encrypting or decrypting data and storing,
independently of key information, recovery information
for recovering key information in an encrypted state so
5 as to be decrypted by a key recovery agent registered
by the encryption apparatus; an approver apparatus for
approving a party who requests a registration approval
for the key recovery agent and giving an authorized
party who requests an approval for decrypting
10 the encrypted recovery information an approval for
decrypting the encrypted recovery information; and
a key decrypter apparatus for decrypting and sending
back the encrypted recovery information only when
a decryption request is made by a party approved by
15 an approver.

The present invention allows recovery of all kinds
of key information, can prevent concentration of rights
pertaining to key decryption and conspiracy between the
key recovery agent and malicious third party, and can
20 improve the safety in key recovery.

Additional objects and advantages of the invention
will be set forth in the description which follows, and
in part will be obvious from the description, or may
be learned by practice of the invention. The objects
25 and advantages of the invention may be realized and
obtained by means of the instrumentalities and combina-
tions particularly pointed out hereinafter.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate presently preferred embodiments of the invention, and together with the general description given above and the detailed description of the preferred embodiments given below, serve to explain the principles of the invention.

FIG. 1 is a block diagram showing the overall configuration of a cryptographic communication system according to an embodiment of the present invention;

FIG. 2 is a block diagram showing the hardware arrangement of an apparatus constructing a user, recovery agent, and certificate authority or approver;

FIG. 3 is a flow chart showing a procedure for registering the key recovery agent in the certificate authority;

FIG. 4 is a flow chart showing a procedure for allowing the user to register the key recovery agent;

FIG. 5 is a registration information table arranged in the certificate authority;

FIG. 6 is a flow chart showing a procedure for transmitting/receiving a cipher message;

FIG. 7 is a view showing the relationship between the user and certificate authority when exchanging the cipher message;

FIG. 8 is a view showing the data structure of

a cipher message prepared by a sender;

FIG. 9 is a flow chart showing a procedure for recovering a key by a sender or receiver;

FIG. 10 is a view showing the relationship between the user, key recovery agent, and approver in the procedure for recovering a key by a sender or receiver;

FIG. 11 is a view showing the data structure of a message transmitted from the user to the key recovery agent;

FIG. 12 is a flow chart showing a procedure for recovering a key by a third party; and

FIG. 13 is a view showing the relationship between the user, key recovery agent, and approver in key recovery.

DETAILED DESCRIPTION OF THE INVENTION

A preferred embodiment of the present invention will now be described.

In the following description, "key piece" implies shared key data; "key decryption" implies to decrypt an encrypted key piece; and "key recovery" implies to decrypt individual key pieces to obtain a key before sharing.

FIG. 1 is a block diagram showing the overall configuration of a cryptographic communication system according to an embodiment of the present invention.

This cryptographic communication system comprises a key recovery agent 3, certificate authority 2, and

approver 4 to allow recovering a session key or user's private key in cryptographic communications between users 1. The user 1, key recovery agent 3, certificate authority 2, and approver 4 can communicate with each other via a network (e.g., the Internet) made up of a public network.

FIG. 2 is a block diagram showing the hardware arrangement of an apparatus constructing the user 1, key recovery agent 3, certificate authority (key recovery center) 2, or approver 4.

An apparatus 11 made up of the user 1, key recovery agent 3, certificate authority 2, or approver 4 has a hardware computer system made up of a CPU 12, controller 13, memory 14, communication device 15, display 16, keyboard 17, printer 18, and data bus 19.

Of these components, the memory 14 includes both a so-called main memory (e.g., a RAM) and a secondary memory (e.g., a hard disk). The functions to be performed by the user 1, key recovery agent 3, the certificate authority 2, or approver 4 are implemented by programs loaded on the main memory and control of the CPU 12 based on these programs. More specifically, the user 1, key recovery agent 3, the certificate authority 2 and approver 4 have different software arrangements. The detailed contents of the functions performed by a combination of hardware and software will be described later with reference to the

operational descriptions and flow charts.

A communication message, various certificates, public key, various information lists, and the like are stored in part of the second memory of the memory 14
5 in correspondence with the user 1, key recovery agent 3, certificate authority 2 and approver 4, respectively. The storage data is used to perform the respective functions.

The communication device 15 is connected to the
10 network and exchange various kinds of information under the control of the CPU 12.

The user 1, key recovery agent 3, certificate authority 2, or approver 4 will be described below.

The user 1 represents a sender who sends a cipher
15 message (cryptographic communication), a receiver who receives the cipher message, or an authentic third party who intercepts the encrypted message. In FIG. 1, the user 1 (#1), user 1 (#2), and user 1 (#3) are defined as the sender, receiver, and authorized third
20 party, respectively. The user 1 has all functions necessary for the sender, receiver, and authorized third party and selectively serves as one of them depending on the situation.

More specifically, the user 1 has his own public
25 and private keys, and has a function of registering the key recovery agent 3 cipher message preparation function, message transmission/reception function,

cipher message decryption function, and key recovery request/recovery function. Note that the apparatus 11 in FIG. 2 constructs the encryption apparatus of the user 1.

5 The key recovery agent 3 has its own public and private keys, and decrypts the received key recovery field with its own private key in response to a request from the registered user 1 and sends back the decrypted recovery field. In doing these processes, the key
10 recovery agent 3 checks the registration signature of the approver 4. There can be a large number of key recovery agents 3. When a given key recovery agent is registered in the certificate authority 2, this agent serves as the key recovery agent 3 in this embodiment.
15 Key recovery agents 3 (#1) through 3 (#n) are available in this embodiment.

 The certificate authority 2 has its own public and private keys and gives signatures (certificate) to each user 1, key recovery agent 3, and approver 4 to issue
20 various certificates. The certificate authority 2 discloses these pieces of information to the user 1 and the like.

 The approver 4 issues an approval to the user 1 when this user 1 performs registration in the key
25 recovery agent and makes a key recovery request. There can be a large number of approvers 4. Approvers 4 (#1) through 4 (#n) are available in this embodiment.

The user 1 can receive one approval from a plurality of approvers 4. In this case, a representative approver is given.

5 The operation of the cryptographic communication system and encryption apparatus in this embodiment having the above arrangements will be described below.

10 In this cryptographic communication system, a key recovery agent registers its own public key in the certificate authority. A user who desires key recovery selects an agent for key recovery request from the key recovery agents registered in the certificate authority and registers the selected agent in advance.

15 After the above preparation, communication is performed between the users. If a transmission session key or user's private key is to be recovered due to the loss of the key or the like, the user requests the registered agent to recover the key.

20 Registration, communication, and key recovery of the system of this embodiment will be described below.
(Registration Procedure of Key Recovery Agent)

FIG. 3 is a flow chart showing a procedure for registering a key recovery agent in the certificate authority.

25 The key recovery agent 3 which wants to be registered in the certificate authority 2 transmits a registration application including its own signature for its own public and private keys to the certificate

authority 2 (s1 in FIG. 3; a in FIG. 1).

5 The certificate authority 2 checks this key
recovery agent 3 and its signature (s2 in FIG. 3)
and issues to this key recovery agent 3 a public
key certificate 17 in which the signature of the
certificate authority is added to the application data
including the public key of the key recovery agent 3
(s3 in FIG. 3; b in FIG. 1).

10 This key recovery agent 3 is registered in
the user/approver/key recovery agent registration
information table in the certificate authority 2.
The contents of this registration information
table are disclosed to the users 1. The key recovery
agent 3 means the agent registered in the certificate
15 authority 2.

(Registration Procedure of User)

 The user 1 who wants to send a message selects
a key recovery agent and registers the selected key
recovery agent in the certificate authority 2.

20 FIG. 4 is a flow chart showing a procedure for
allowing the user to register the key recovery agent.

 Assume that the user 1 (#1) in FIG. 1 registers
a key recovery agent.

25 In subscription to one or a plurality of key
recovery agents 3, the user 1 (#1) sends a key recovery
agent registration application 18 to the approver 4
(t1 in FIG. 4; c in FIG. 1).

The user 1 may request an approval to one approver 4 or approvals to a plurality of approvers 4 in order to improve the safety pertaining to the key recovery. To request approvals to the plurality of approvers 4, the user 1 sends a registration application to only a representative approver. (t1 in FIG. 4).

The representative approver transmits the registration application to each approver 4, and each approver 4 checks the contents of the key recovery agent registration application and gives a signature (e.g., using a multiple signature scheme). The application is finally returned to the representative approver. A key recovery agent registration approval is transmitted from the representative approver to the user 1 (#1) (t2 in FIG. 4; d in FIG. 1).

The user 1 (#1) sends a subscription application with the key recovery agent registration approval acquired from the approvers 4 to each key recovery agent 3 that the user 1 (#1) wants to register (t3 in FIG. 4; e in FIG. 1). Note that the number of key recovery agents that the user 1 wants to register may be one, but the user 1 registers a plurality of key recovery agents 3 in principle.

Upon receiving the registration approval, each key recovery agent 3 checks the signatures of the approvers 4 in the key recovery agent registration approval and adds its own signature to this approval.

Each key recovery agent 3 issues a key recovery agent registration certificate to the user 1 (#1) (t4 in FIG. 4; f in FIG. 1).

5 When the process for acquiring key recovery agent registration certificates from all the key recovery agents 3 is not complete, the processes in steps t1 to t4 are repeated (t5 in FIG. 5).

10 The user 1 (#1) requests the certificate authority 2 to issue a registered key recovery agent list certificate with the key recovery agent registration certificates acquired from the agents 3 (t6 in FIG. 4; g in FIG. 1).

15 The certificate authority 2 checks the signatures of the key recovery agents 4 on the key recovery agent registration certificates and adds its own signature. The certificate authority 2 issues a registered key recovery agent list certificate to the user 1 (#1) (t7 in FIG. 4; h in FIG. 1).

20 The key recovery agents 3 listed up in this agent list are the registered key recovery agents 3 of the user 1 (#1). The key recovery field of the user 1 (#1) can be decrypted using the private keys of these agents 3.

25 The certificate authority 2 issues the registered key recovery agent list certificate and at the same time reflects the contents of the list on the registration information table described above.

FIG. 5 is a registration information table arranged in the certificate authority.

Referring to FIG. 5, the registration information table 21 has public keys 23 with signatures approved as
5 the public keys of the user 1, and a user registered agent list 24 in correspondence with user IDs (identification information) 22 of the users 1, approvers 4, or key recovery agents 3.

The public key 23 with signature represents that
10 this key is a public key of the user 1 or the like, which is approved by the certificate authority. This public key 23 is issued to a requester for this information in the form of a public key certificate.

The user registered agent list 24 is formed
15 in correspondence with each registered user. Upon receiving the contents of this list, the third party can know the correspondence between the users 1 and the key recovery agents 3.

The contents of the registration information
20 table 21 are open to the public, and the user 1 or agent 3 can know the table contents as if it finds out a telephone number in a telephone directory. The agent 3 registered in the table 21 registers its own public key in the certificate authority 2.
25 Such a key may be listed on the table 21.

(Transmission/Reception of Cipher Message)

A process for actually exchanging a cipher message

between the users 1 who have registered the agents will be described below. In this case, the user 1 (#1) serves as a sender, and the user 1 (#2) serves as a receiver. Note that the user 1 (#2) have already
5 registered the agents in the process shown in FIG. 4.

FIG. 6 is a flow chart showing a procedure for transmitting/receiving a cipher message.

FIG. 7 is a view showing the relationship between the user and certificate authority in transmitting/
10 receiving a cipher message.

The user 1 (#1) serving as a sender (to be simply referred to as a sender hereinafter) inquires of the certificate authority 2 the receiver's public keys and the registered key recovery agent list in order to
15 obtain the information of the key recovery agents 3 (v1 in FIG. 6; i in FIG. 7).

The certificate authority 2 prepares a receiver's public key certificate and registered key recovery agent list certificate from the contents of the
20 registration information table 21 and transmits them to the sender (v2 in FIG. 6; j in FIG. 7). This process corresponds to user's operation for finding out a telephone number in a telephone directory (registration information table 21) prepared in the certificate
25 authority 2.

The sender prepares a transmission message (cipher message) using the registered key recovery

agent list certificate of the receiver accessed from the certificate authority 2 (v3 in FIG. 6).

FIG. 8 is a view showing the data structure of a cipher message prepared by the sender.

5 This cipher message 31 is made up of a header 32, sender's key recovery field 33, receiver's key recovery field 34, signature 35, session key distribution information 36, and cipher message body 37.

10 The header 32 stores information such as the size of data following sender's and receiver's key recovery fields.

15 The sender's key recovery field 33 stores information used when the sender's key recovery agent 3 recovers the key. The receiver's key recovery field 34 stores information used when the receiver's key recovery agent 3 recovers the key. Each of the sender's and receiver's key recovery fields 33 and 34 stores pairs of IDs 38 of the key recovery agents 3 and session key piece $[[Ski]KRA(i)pb]$ data 39 encrypted using the public keys of the key recovery agents 3.
20 The number of pairs of the IDs 38 and data 39 is equal to the number of key recovery agents.

25 The receiver's agent IDs and agent's public key used to prepare the receiver's key recovery field 34 are obtained from the registered key recovery agent list certificate accessed in step v2.

 The signature 35 ($[[KRF]USR1pr]$) generated using

the sender's key [USR1pr] is added to the cipher message 31 in order to prevent alteration of the sender's and receiver's key recovery fields [KRF] 33 and 34.

5 The session key distribution information 36 stores a session key [[SK]USR2pb] encrypted using the receiver's public key [USR2pb].

10 The cipher message body 37 ([[M]SK]) encrypted using the session key [SK] is added as the transmission data body to the end of the cipher message 31.

 The cipher message 31 constructed as described above is transmitted from the sender (user 1 (#1)) to the receiver (user 1 (#2)) (v4 in FIG. 6; k in FIG. 7).

15 Upon receiving the cipher message having the structure shown in FIG. 8, the receiver decrypts the session key information 36 using his own private key to extract the session key. The receiver then decrypts the cipher message body 37 using the extracted session key to extract the transmission data (v5 in FIG. 6).

20 (Key Recovery Procedure of Session Key)

 Decrypting the cipher message normally as in step v5 of FIG. 6 suffers no problem. A recovery process will be described when the user 1 loses a session key.

25 FIG. 9 is a flow chart showing a procedure for recovering a key by the sender or receiver.

 FIG. 10 is a view showing the relationship between the user, key recovery agent, and approver when the

sender or receiver recovers the key.

Assume that the user 1 who requests key recovery has, in advance, information (e.g., an ID) pertaining to the key recovery agent 3 capable of recovering a key recovery field serving as a recovery target. In this case, the user 1 is a message sender (user 1 (#1)) or message receiver (user 1 (#2)).

The receiver cannot acquire a session key due to some reason and cannot read the cipher message body 37.

When the user 1 (#2) loses the session key (w1 in FIG. 9), he sends a key recovery approval application to the approvers 4 (w2 in FIG. 9; 1 in FIG. 10).

The approvers 4 check the key recovery approval application and add signatures (e.g., using a multiple signature scheme). A representative approver sends back a key recovery approval to the user 1 (#2) (w3 in FIG. 9; m in FIG. 10).

The user 1 (#2) extracts the key recovery field 33 or 34 from the cipher message 32 and prepares a message to each key recovery agent 3 designated in the extracted key recovery field (w4 in FIG. 9).

FIG. 11 is a view showing the data structure of the message transmitted from the user to the key recovery agent.

As shown in FIG. 11, a message 41 is obtained such that data [M'] made up of a key recovery approval 42 obtained from the approver 41, the key recovery

field 43 extracted from the cipher message 31, and an encryption key 44 used to transmit the recovered session key pieces is encrypted with the public key $[KRA(i)pb]$ of each key recovery agent.

5 The user 1 (#2) transmits the message 41 containing the approval 42 and recovery field 43 to each key recovery agent 3 (w5 in FIG. 9; \underline{n} in FIG. 10).

10 The key recovery agent 3 decrypts the encrypted $[[M']KRA(i)pb]$ 41' with its own private key to extract the key recovery approval, key recovery field, and encryption key $[SK']$. The key recovery agent 3 then checks the signature of the approver on the key recovery approval 42 (w6 in FIG. 9).

15 Upon checking the approval 42, the key recovery agent 3 decrypts the key recovery field 43 with its own private key to recover the session key pieces (w7 in FIG. 9). The recovered pieces are encrypted with the encryption key $[SK']$ and transmitted from the agent 3 to the user 1 (#2) (w7 in FIG. 9; \underline{o} in FIG. 10).

20 Upon receiving these session key pieces, the user 1 (#2) decrypts with the decryption key $[SK']$ the encrypted session key transmitted from each key recovery agent 3. The user 1 (#2) then recovers the original session pieces using, e.g., a Langragean
25 interpolation polynomial on the basis of the decrypted session key pieces (w7 in FIG. 9).

 The Lagrange interpolation formula is used to

allow recovering the session key if a predetermined number of pieces of a plurality of pieces are recovered. That is, when the key is expanded into key pieces using the Lagrange interpolation formula, the key can
5 be recovered using a predetermined number of pieces (k) ($\leq n$) of the n key pieces.

Operation will be described when the user 1 who requests key recovery does not have information (e.g., an ID) pertaining to the key recovery agent 3
10 capable of recovering a key recovery field serving as a recovery target. In this case, the user 1 may be an authentic third party (user 1 (#1)).

FIG. 12 is a flow chart showing a procedure for recovering a key by a third party.

15 In this case, information of the key recovery agent 3 for the key recovery field 33 or 34 contained in the cipher message 31 must be acquired.

The user 1 (#3) inquires of the certificate authority 2 the sender's or receiver's public key and
20 the registered key recovery agent list (x_1 in FIG. 12).

The certificate authority 2 prepares a sender's or receiver's public key certificate and registered key recovery agent list certificate from the contents of the registration information table 21 and transmits
25 them to the user 1. The user 1 (#3) receives them (x_2 in FIG. 12). This process corresponds to user's operation for finding a telephone number in a telephone

directory (registration information table 21) arranged in the certificate authority 2.

5 The user 1 (#3) requests approvals for key recovery to the approvers 4 (p and q in FIG. 1) and sends the approvals together with the key recovery field serving as the recovery target to the key recovery agents 3 and then obtains the recovery pieces (r and s in FIG. 1). The user 1 (#3) recovers the session key. This process is the same as in steps ww (w2 through w8) in FIG. 9, and a detailed description thereof will be omitted.

(Recovery Procedure of Other Keys)

15 The recovery of the session key itself contained in cryptographic communication has been described above. Other keys may be recovered using the system of this embodiment. An example of other keys is a private key (user's private key) used by the user 1, and its recovery process will be described below. In this case, this embodiment serves as a key recovery system.

20 FIG. 13 is a view showing the relationship between the user, key recovery agent, and approver in key recovery.

25 The user 1 (#1) encrypts its own private key with the public key of the key recovery agent 3 (when the number of registered agents is one) or expands the private key into pieces (when the number of registered agents are many; this will apply to

the following description). The user 1 (#1) generates user's private key recovery fields obtained by encrypting the respective pieces with the public keys of different key recovery agents and stores them in the memory of the user as the private key backup. Such a user's private key recovery field corresponds to the sender's or receiver's key recovery field.

The user's private key recovery field stores the key recovery agent IDs and data of private keys encrypted with the public keys of the key recovery agents or data of encrypted private key pieces. The number of pairs of storage data is equal to the number of key recovery agents. When a private key is lost or destroyed due to some reason, and the user cannot recover the key, the user 1 (#1) sends a user's private key recovery approval application to the approvers 4 (t in FIG. 14). Each approver 4 checks the user's private key recovery approval application and gives its signature (e.g., using a multiple signature scheme). The final approver (representative approver) transmits a user's private key recovery approval to the user 1 (#1) (u in FIG. 13).

The user 1 (#1) then sends, to each key recovery agent 3, a user's private key recovery approval encrypted with the public key of each key recovery agent, a user's private key recovery field, and an encryption key used to transmit the recovered user's

private key or user's private key pieces (y in FIG. 13).
Data transmitted at this time is like the one shown in
FIG. 11.

Each key recovery agent 3 decrypts the encrypted
5 user's private key recovery approval, user's private
key recovery field, and encryption key used to transmit
the decrypted user's private key pieces (or user's
private key). Each key recovery agent 3 checks the
signature of the approver on the user's private key
10 recovery approval. Each key recovery agent recovers
the private key pieces (or the entire private key)
using the user's private key recovery field and sends,
to the user 1 (#1), the private key pieces (or the
entire private key) encrypted using the encryption key
15 for private key piece transmission designated by the
user (w in FIG. 13).

The user 1 (#1) decrypts the encrypted private key
pieces (or the entire private key) transmitted from
each key recovery agent 3. Upon receiving the key
20 pieces, for example, the Lagrange interpolation formula
is used to recover the original private key based on
the private key pieces.

As described above, in the cryptographic
communication system and encryption apparatus of this
25 embodiment of the present invention, the certificate
authority 2 and approvers 4 are arranged in addition to
the key recovery agents 3. The rights to key recovery

by the key recovery agents can be distributed to improve the safety in key recovery.

In order to prevent concentration of the key recovery function of the key recovery center
5 (certificate authority) and the key recovery agent, at least one approver checks and approves the user registration application, key recovery application, and private key recovery application to the key recovery agent. The approval process using the approver 4
10 as the third party is introduced in addition to the certificate authority 2 for managing various kinds of information, thereby greatly improving the safety pertaining to key recovery.

Since each user can selectively register a desired
15 one of a plurality of key recovery agents registered in the certificate authority, highly safe and reliable key recovery can be practiced. Conspiracy between the key recovery agent and malicious third party can be prevented.

20 Since the registration information table 21 is arranged in the certificate authority 2, so that the information of the table 21 is open to the public, the user can easily inquire registration information to the agent. The key recovery process in cryptographic
25 communication between the users who registers different key recovery agents 3 can be easily performed.

The sender's key recovery field containing

information of a key recovery agent registered by the sender and the receiver's key recovery field containing information of a key recovery agent registered by the receiver are generated and transmitted together with the encryption data. The key recovery can be easily performed even if the sender and receiver for data communications are controlled under different key recovery centers.

According to the key recovery system of this embodiment, not only the key information of the session key used for generating cipher data but also the key information of the private key used for key distribution or signature generation can be recovered using a plurality of key recovery agents.

The present invention can be implemented by loading programs, data, and the like stored in a storage medium to a computer. If the storage medium is a computer-readable storage medium which can store programs, the storage format is not limited to a specific one. Examples of the storage medium are a magnetic disk, floppy disk, hard disk, optical disk (e.g., a CD-ROM, CD-R, or DVD), magnetooptical disk (e.g., an MO), and semiconductor memory.

An OS (Operating System) running on the computer on the basis of the instructions from programs installed from the storage medium to the computer and MW (MiddleWare) such as database management software

and network software may constitute some of processes for implementing the embodiment.

The storage medium of the present invention is not limited to a medium independent of the computer, but
5 may include a storage medium storing or temporarily storing a downloaded program transmitted via a LAN or Internet.

The number of storage media is not limited to one, but the storage medium of the present invention
10 includes a plurality of storage media which perform the processes of the embodiment.

The computer of the present invention is to execute processes of the embodiment on the basis of programs stored in the storage medium. The computer
15 may be a single apparatus such as a personal computer or a system in which a plurality of apparatuses are connected via a network.

The computer of the present invention is not limited to a personal computer, but includes
20 a microcomputer and an arithmetic processing device included in an information processing apparatus. The computer is a representative of the apparatuses and devices capable of performing the functions of the present invention by programs.

25 As has been described above, according to the present invention, there can be provided a cryptographic communication system and key recovery

system capable of preventing concentration of rights
pertaining to key decryption and conspiracy between
the agents, and improving the safety in key recovery.

5 According to the present invention, there is
provided an encryption apparatus, cryptographic
communication system, key recovery system, and storage
medium, in which in cryptographic communications
between users who register different agents, each user
or authentic third party can easily acquire the agent
10 information and recover the key.

Additional advantages and modifications will
readily occur to those skilled in the art. Therefore,
the invention in its broader aspects is not limited to
the specific details and representative embodiments
15 shown and described herein. Accordingly, various
modifications may be made without departing from the
spirit or scope of the general inventive concept as
defined by the appended claims and their equivalents.

WHAT IS CLAIMED IS:

1. An encryption apparatus, comprising:
means for encrypting a data body; and
means for transmitting transmission data to
5 a receiver, the transmission data including:
the encrypted data body;
sender's key recovery data obtained by encrypting
recovery information for recovering a key for
decrypting the encrypted data body to allow a key
10 recovery agent registered by a sender to decrypt
the recovery information; and
receiver's key recovery data obtained by
encrypting the recovery information for recovering
the key for decrypting the encrypted data body to allow
15 a key recovery agent registered by a receiver to
decrypt the recovery information.
2. An encryption apparatus according to claim 1,
wherein the key recovery agent comprises in a plural
form and when the sender or receiver registers
20 a plurality of key recovery agents, the recovery
information contained in the sender's or receiver's key
recovery data is a set of parts of a decryption key for
decrypting the encrypted data body, and the parts of
the decryption key are so encrypted as to be decrypted
25 by different key recovery agents.
3. A cryptographic communication system
comprising:

an encryption apparatus, comprising:
means for encrypting a data body; and
means for transmitting transmission data to
a receiver, the transmission data including:

5 the encrypted data body;

sender's key recovery data obtained by encrypting
recovery information for recovering a key for
decrypting the encrypted data body to allow a key
recovery agent registered by a sender to decrypt
10 the recovery information; and

receiver's key recovery data obtained by
encrypting the recovery information for recovering
the key for decrypting the encrypted data body to
allow a key recovery agent registered by a receiver
15 to decrypt the recovery information; and

a plurality of key recovery agents each, when
registered by sender or receiver, capable of decrypting
sender's or receiver's key comprised of a plurality of
key pieces obtained by dividing the key into pieces.

20 4. A cryptographic communication system according
to claim 3, further comprising:

a certificate authority apparatus arranged
to allow accepting registration of at least key
recovery agent and receivers and provide information
25 representing correspondence between each registered
receiver and a key recovery agent and information
representing that said encryption apparatus encrypts

the recovery information so as to allow the key recovery agent to decrypt the recovery information.

5. A cryptographic communication system according to claim 3, further comprising:

5 an approver apparatus for approving a requester for key recovery agent registration approval and approving an authorized third party, who requests an approval for decrypting the sender's or receiver's key recovery data, to decrypt the sender's or receiver's
10 key recovery data; and

wherein said key decrypter apparatus decrypts and sends back the sender's or receiver's key recovery data only when a request is made by a party approved by an approver.

15 6. A cryptographic communication system according to claim 4, further comprising:

an approver apparatus for approving a requester for key recovery agent registration approval and approving an authorized third party, who requests an
20 approval for decrypting the sender's or receiver's key recovery data, to decrypt the sender's or receiver's key recovery data; and

wherein said key decrypter apparatus decrypts and sends back the sender's or receiver's key recovery data
25 only when a request is made by a party approved by an approver.

7. A key recovery system comprising:

an encryption apparatus using key information
for encrypting or decrypting data and storing,
independently of key information, recovery information
for recovering key information in an encrypted state so
5 as to be decrypted by a key recovery agent registered
by said encryption apparatus;

an approver apparatus for approving a party who
requests a registration approval for the key recovery
agent and giving an authorized party who requests
10 an approval for decrypting the encrypted recovery
information an approval for decrypting the encrypted
recovery information; and

a key decrypter apparatus for decrypting and
sending back the encrypted recovery information only
15 when a decryption request is made by a party approved
by an approver.

8. A computer-readable storage medium storing
a program for controlling an encryption apparatus for
encrypting a data body to make an encrypted data body
20 contain in transmission data and transmitting
the transmission data to a receiver, said program
comprising means for containing, in the transmission
data;

sender's key recovery data obtained by encrypting
25 recovery information for recovering a key for
decrypting the encrypted data body to allow a key
recovery agent registered by a sender to decrypt

the recovery information; and

receiver's key recovery data obtained by
encrypting the recovery information for recovering
the key for decrypting the encrypted data body to
5 allow a key recovery agent registered by a receiver
to decrypt the recovery information.

ABSTRACT OF THE DISCLOSURE

In an encryption apparatus for encrypting
a data body to contain an encrypted data body in
transmission data and transmitting the transmission
5 data to a receiver, the transmission data includes
sender's key recovery data obtained by encrypting
recovery information for recovering a key for
decrypting the encrypted data body to allow a key
recovery agent registered by a sender to decrypt
10 the recovery information, and receiver's key recovery
data obtained by encrypting the recovery information
for recovering the key for decrypting the encrypted
data body to allow a key recovery agent registered by
a receiver to decrypt the recovery information.

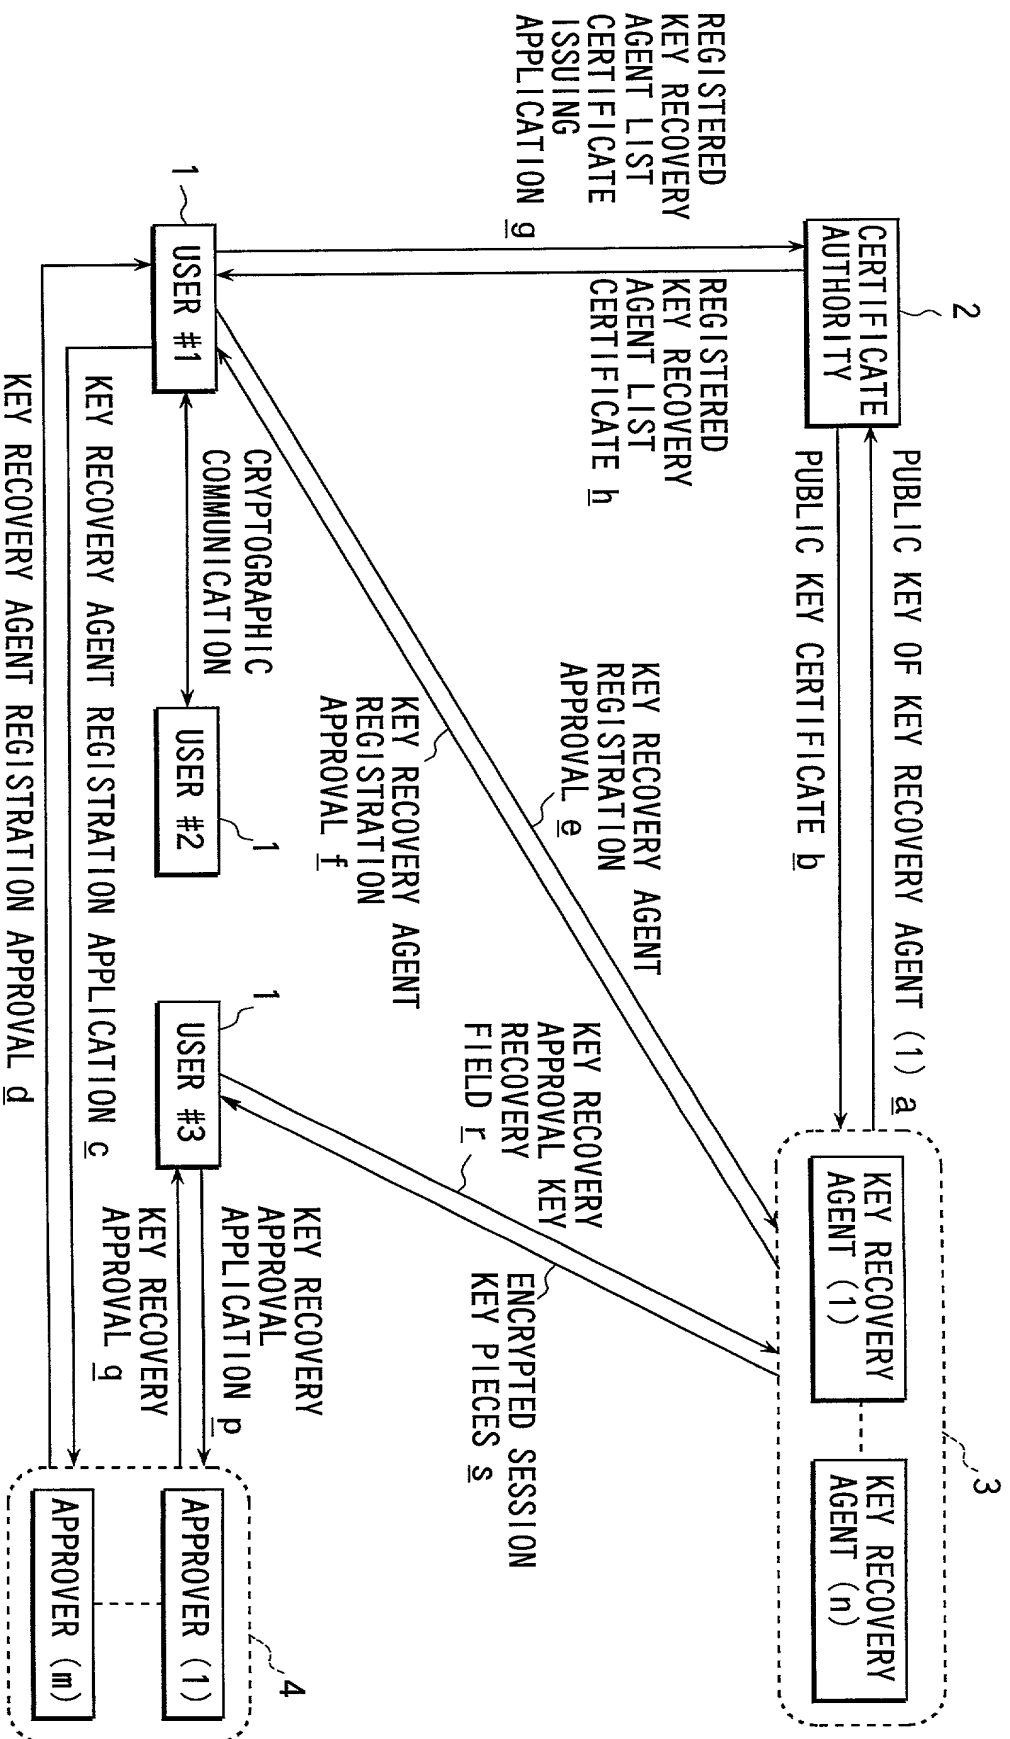


FIG. 1

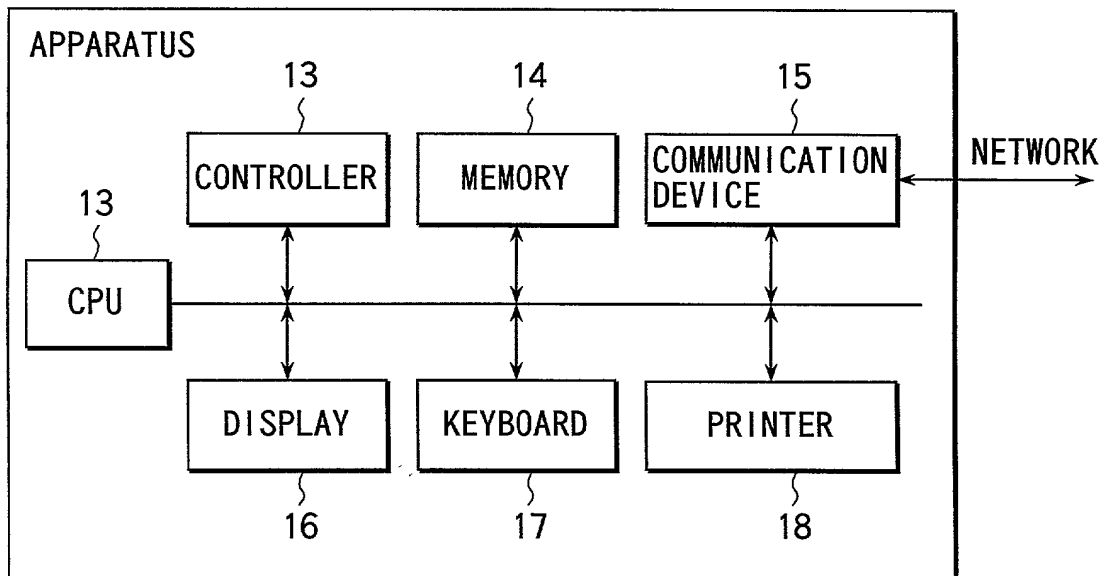


FIG.2

PROCEDURE FOR REGISTERING
KEY RECOVERY AGENT IN
CERTIFICATE AUTHORITY


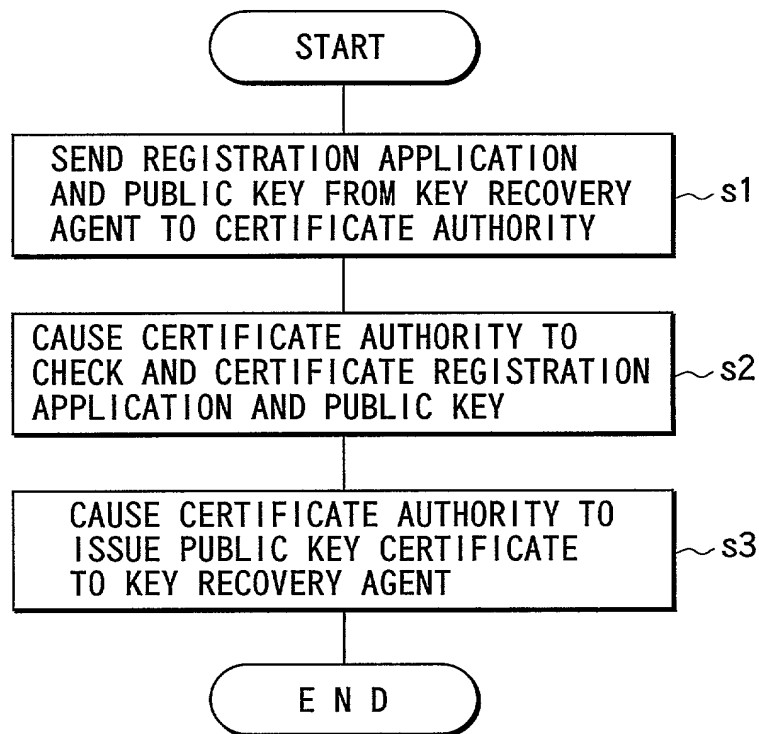


FIG.3

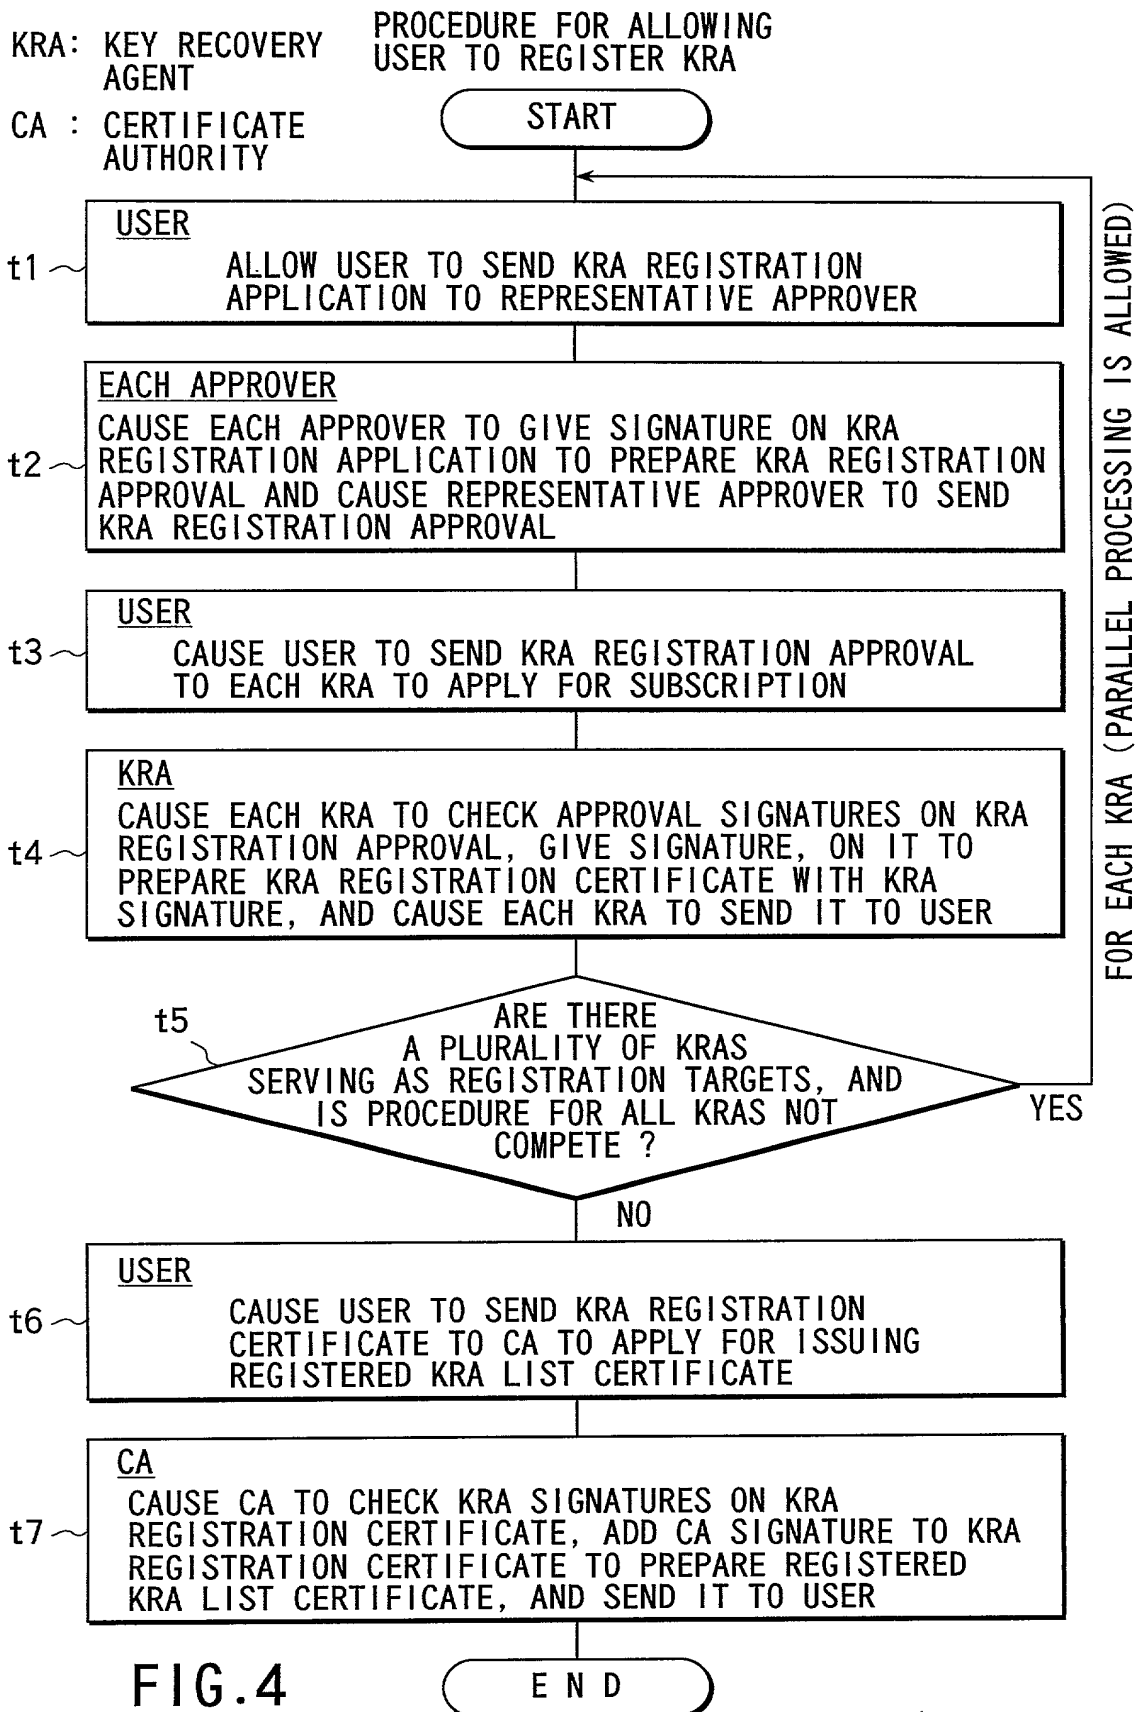

REGISTERED INFORMATION TABLE 21

ID OF USER, APPROVER, AND KEY RECOVERY AGENT	PUBLIC KEY WITH SIGNATURE OF CERTIFICATE AUTHORITY	AGENT LIST REGISTERED BY USER
<div>USER #1</div> <div>USER #2</div> <div>...</div> <div>APPROVER α</div> <div>APPROVER β</div> <div>...</div> <div>AGENT A</div> <div>AGENT B</div> <div>...</div>	<div>○○○○</div> <div>××××</div> <div>...</div> <div>△△△△</div> <div>□□□□</div> <div>...</div> <div>* * * *</div> <div>▽▽▽▽</div> <div>...</div>	<div>A, B, C,</div> <div>B, D, G, H</div> <div>...</div> <div>NONE</div> <div>NONE</div> <div>...</div> <div>NONE</div> <div>NONE</div> <div>...</div>

FIG.5

RECEPTION/TRANSMISSION OF CIPHER MESSAGE

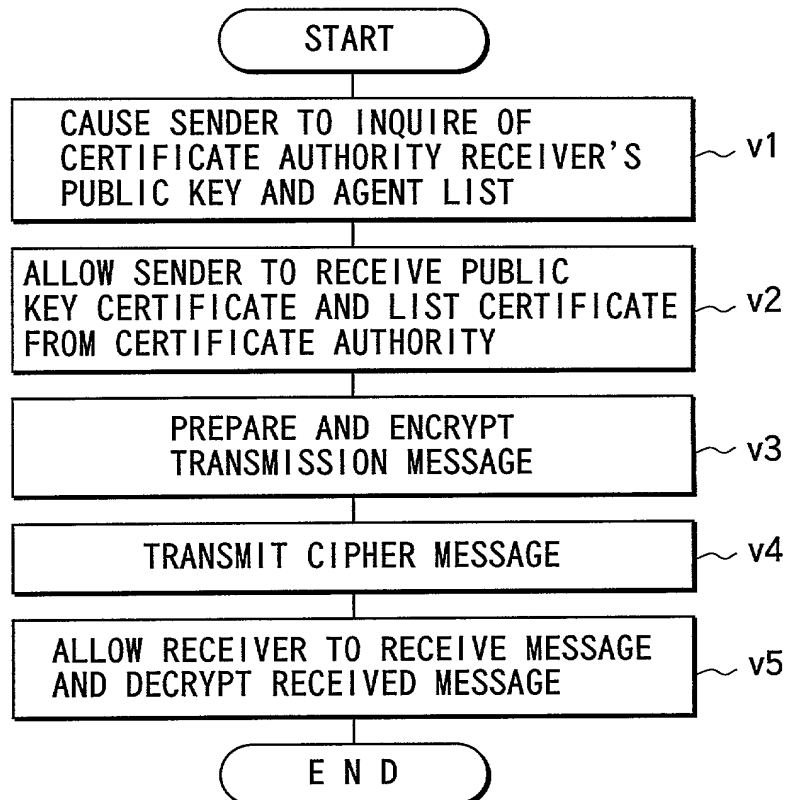


FIG.6

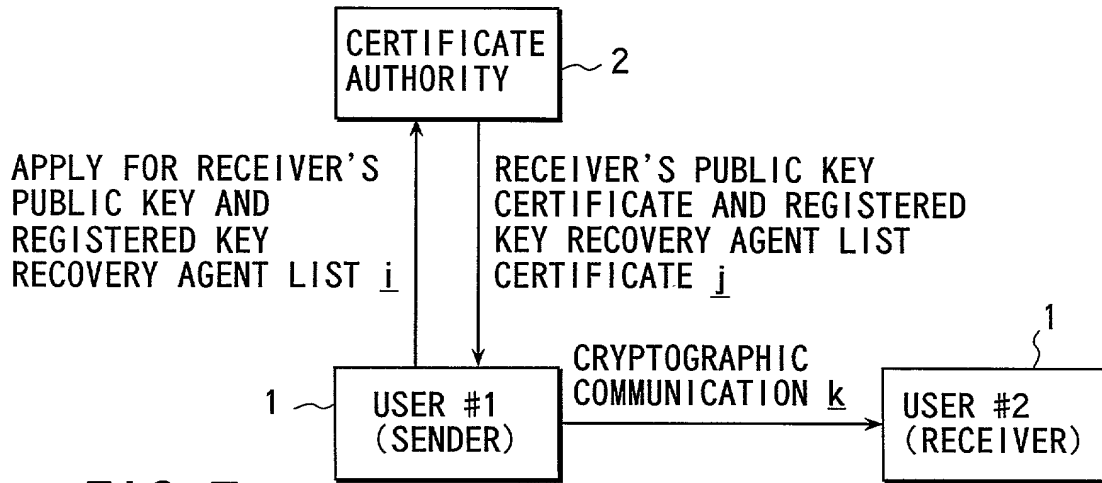


FIG. 7

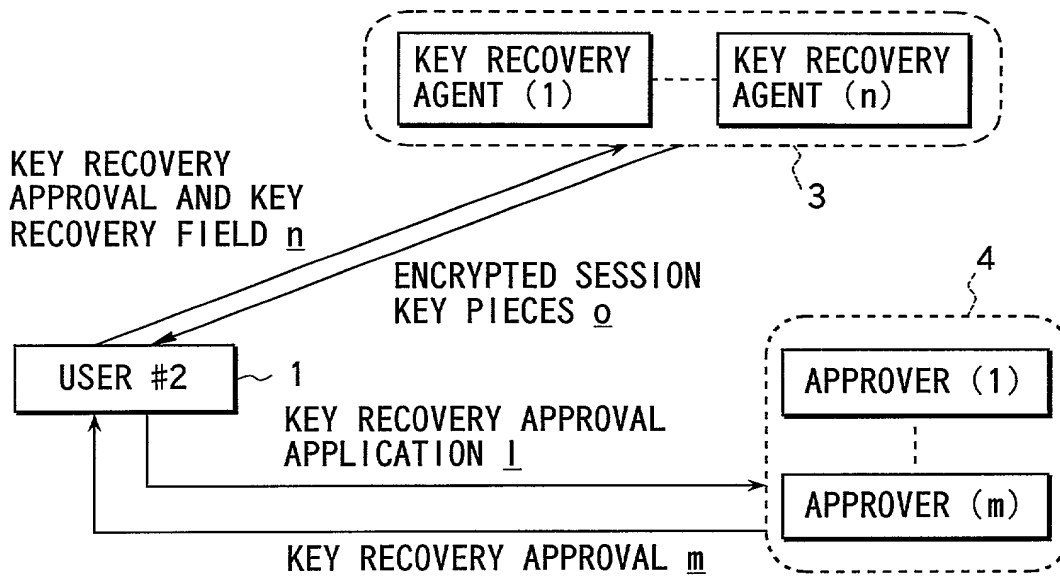


FIG. 10


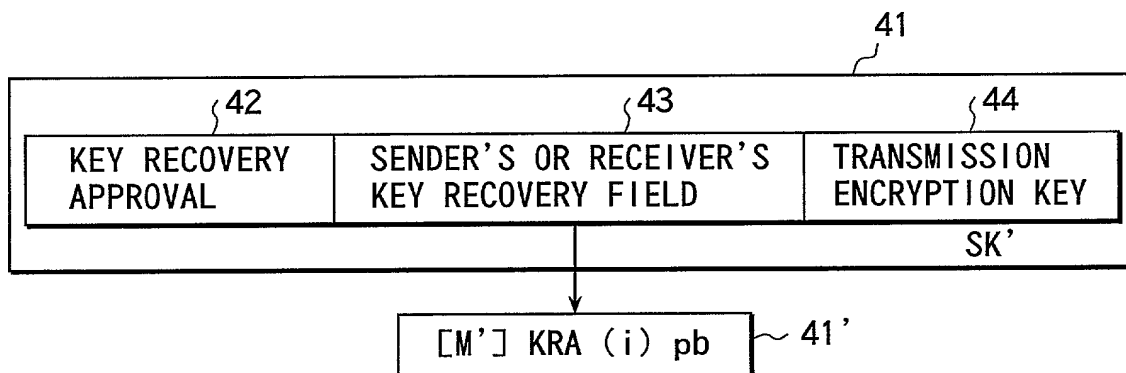


FIG. 11

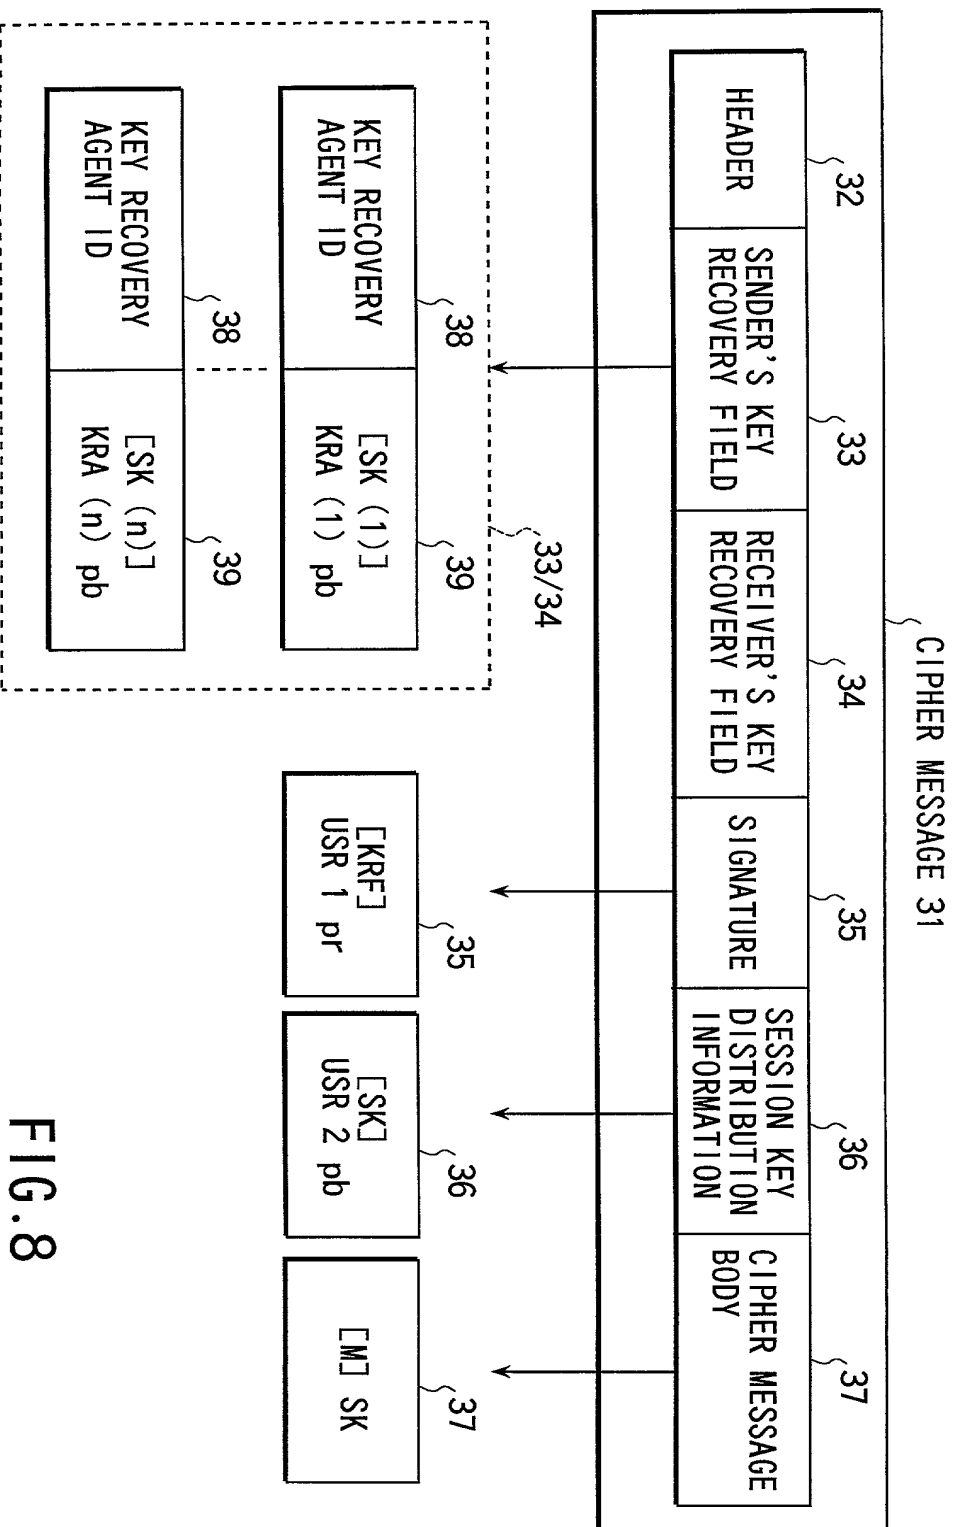

PROCEDURE FOR KEY RECOVERY BY SENDER OR RECEIVER

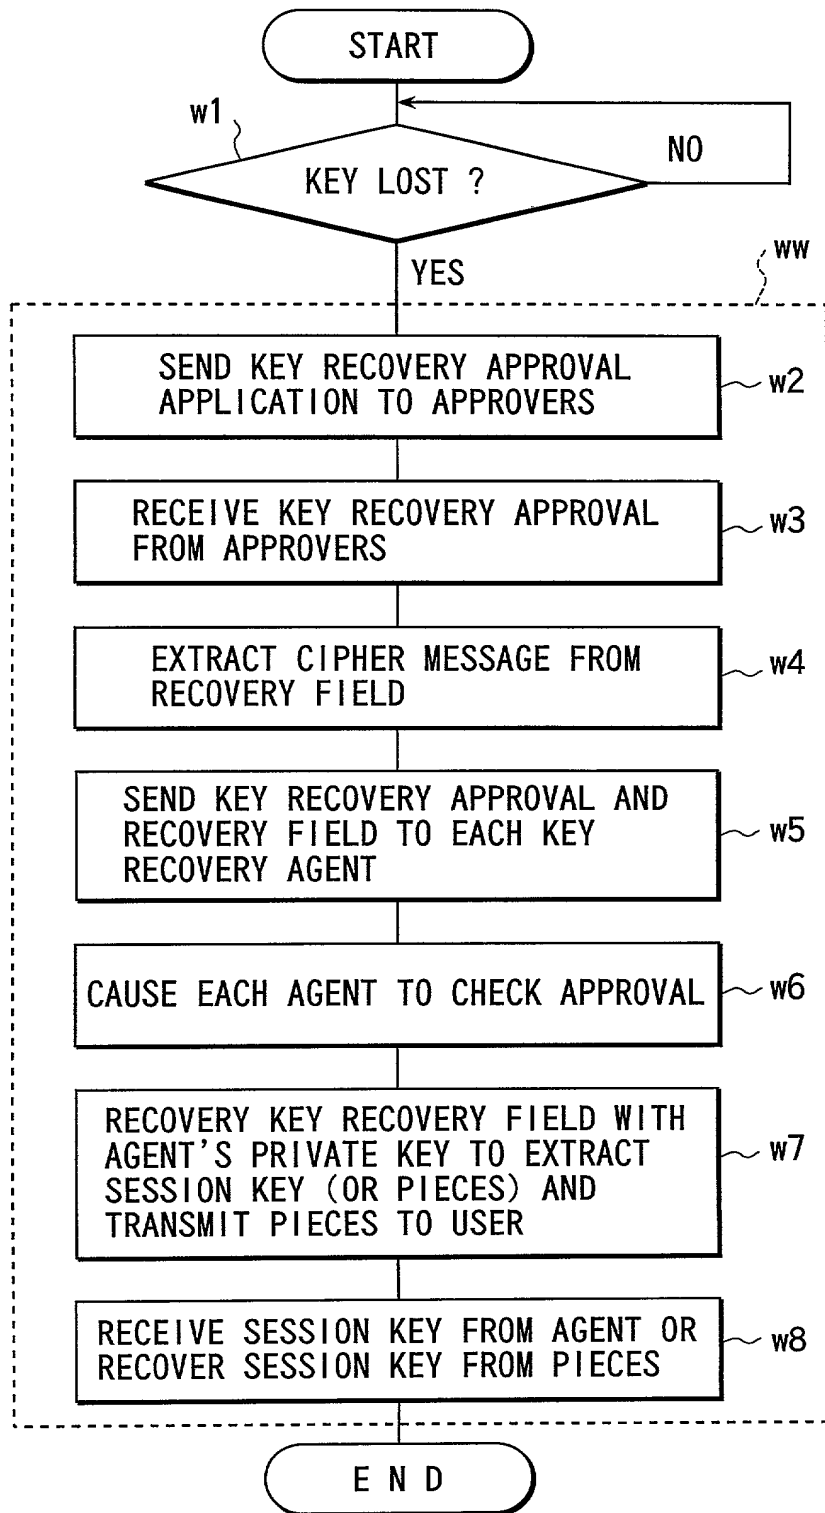


FIG.9

PROCEDURE FOR RECOVERING KEY BY THIRD PARTY

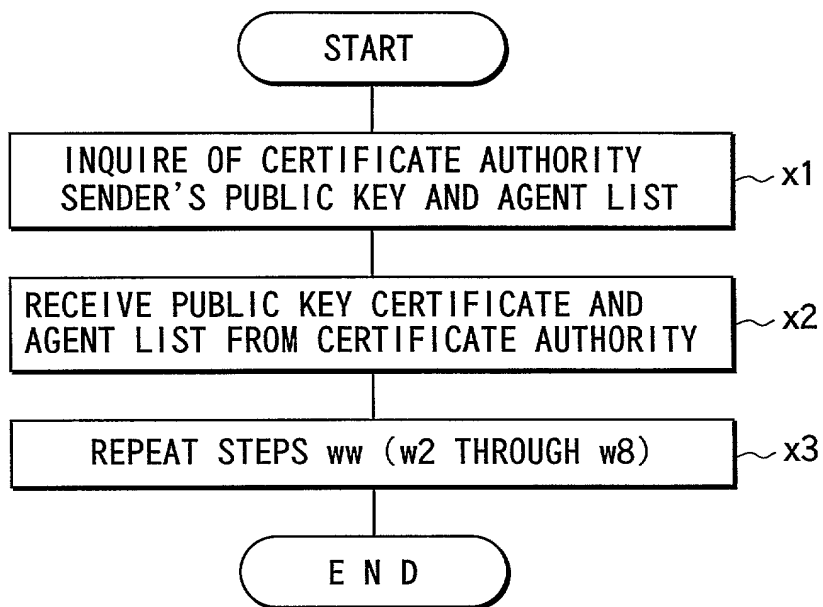


FIG.12

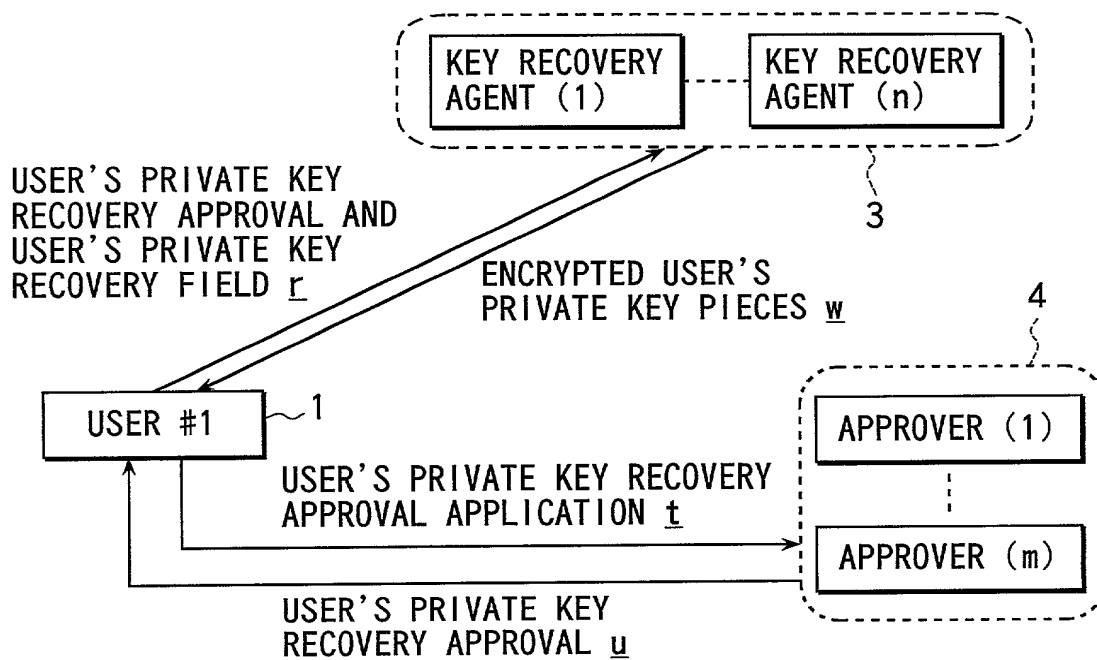


FIG.13